
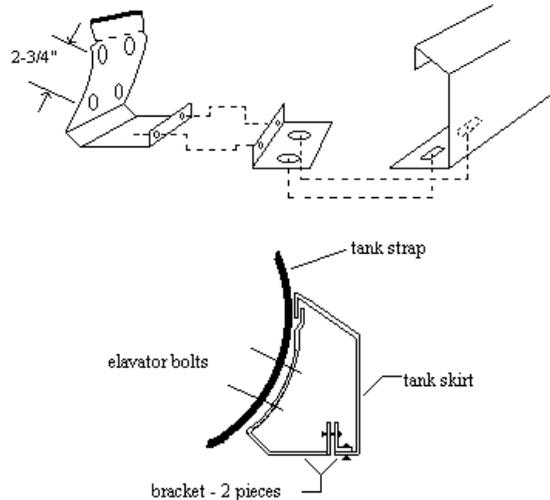


STAINLESS STEEL ACCESSORIES

TANK SKIRT

INSTALLATION INSTRUCTIONS

1. To mark bracket holes onto tank strap:
 - a. Place bracket on strap and, using a level, move bracket down until bottom of bracket is horizontal. (figure 1)
 - b. Transfer bracket bolt holes to tank strap.
 - c. Repeat process for second bracket.
2. Loosen off straps one at a time.
3. Slide wood between tank and strap.
4. Drill 5/16" dia. holes and deburr.
5. Cut rubber or fabric material around holes on backside of strap.

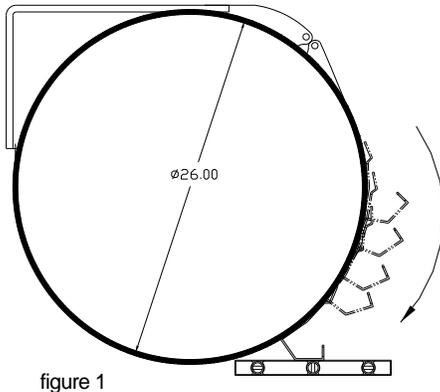

6. Insert elevator bolts through backside.
7. Place bracket onto strap over elevator bolts. Install hex nuts supplied and tighten just until bracket is flush with strap.
8. Re-tighten strap.
9. Loosen top bolts on brackets allowing skirt to be placed over top of bracket.

10. Hook skirt at top of bracket as shown.
11. Making sure the tank skirt is level, drill 5/16" holes through bottom lip of tank skirt in bracket hole locations.
12. Bolt skirt at bottom to bracket.
13. Adjust skirt as necessary and complete tightening.
14. Remove protective plastic coating.