


## STAINLESS STEEL ACCESSORIES

### LOW PROFILE TANK SKIRT

#### INSTALLATION INSTRUCTIONS

1. Assemble brackets as shown in diagram.
2. Loosen off outer straps on fuel tank "J" bracket ends. (only the outer two are required).
3. Remove the bolts that hold strap brackets in place at ends of "J" brackets.
4. Install supplied brackets as shown in diagram, leaving the brackets movable until last step.
5. Place fuel tank skirts on top of brackets, and center tank skirt to tank.

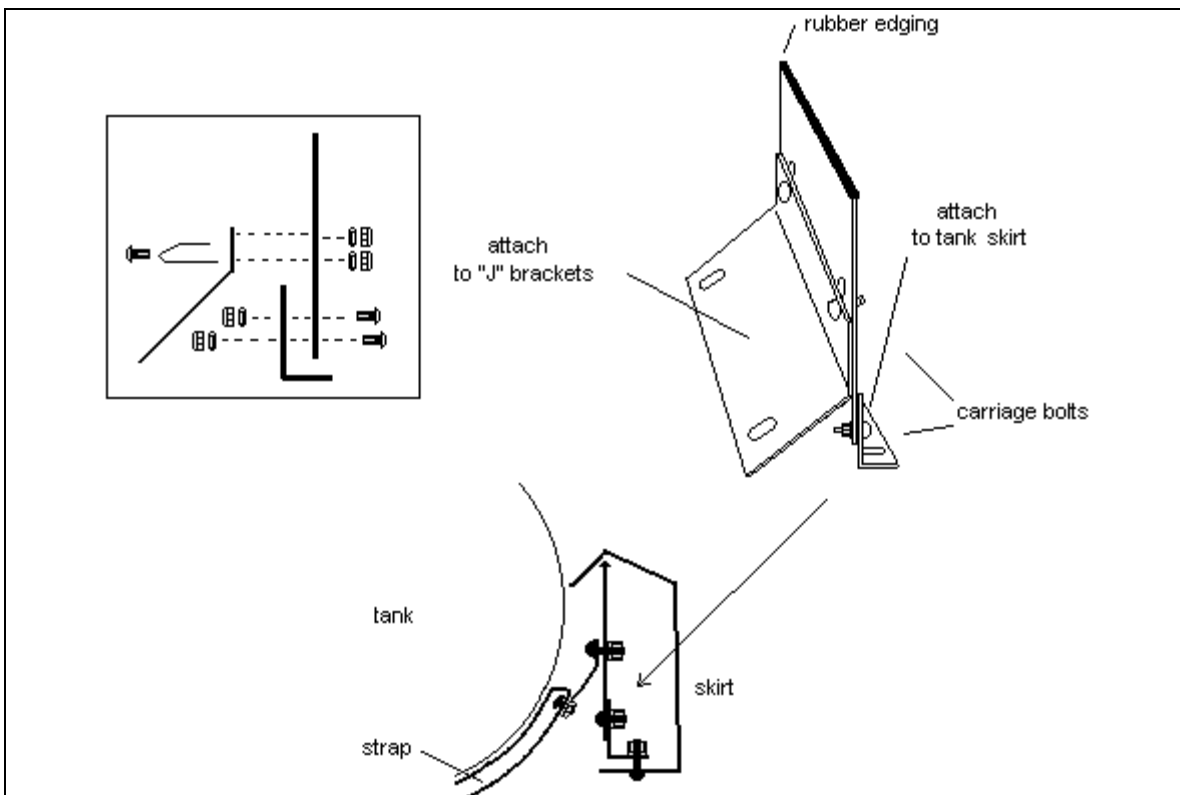

6. Making sure tank skirt is vertically level. Drill 5/16" holes through bottom lip of skirt, in line with slots on brackets.
7. Use supplied hardware to attach skirts to brackets, and tighten.
8. The lower bracket must be pulled down to tighten the tank skirt to the brackets. When pulling down lower bracket, tighten bolts to hold position.
9. When skirt is in desired position, tighten all remaining hardware.