


Stainless Steel Accessories

FUEL TANK SKIRT

INSTALLATION INSTRUCTIONS

1. Mark holes on straps as per measurements.
2. Loosen off straps – one at a time.
3. Slide wood between tank and strap.
4. Drill 5/16" dia. holes and deburr.
5. Cut rubber or fabric material around holes on backside of strap.

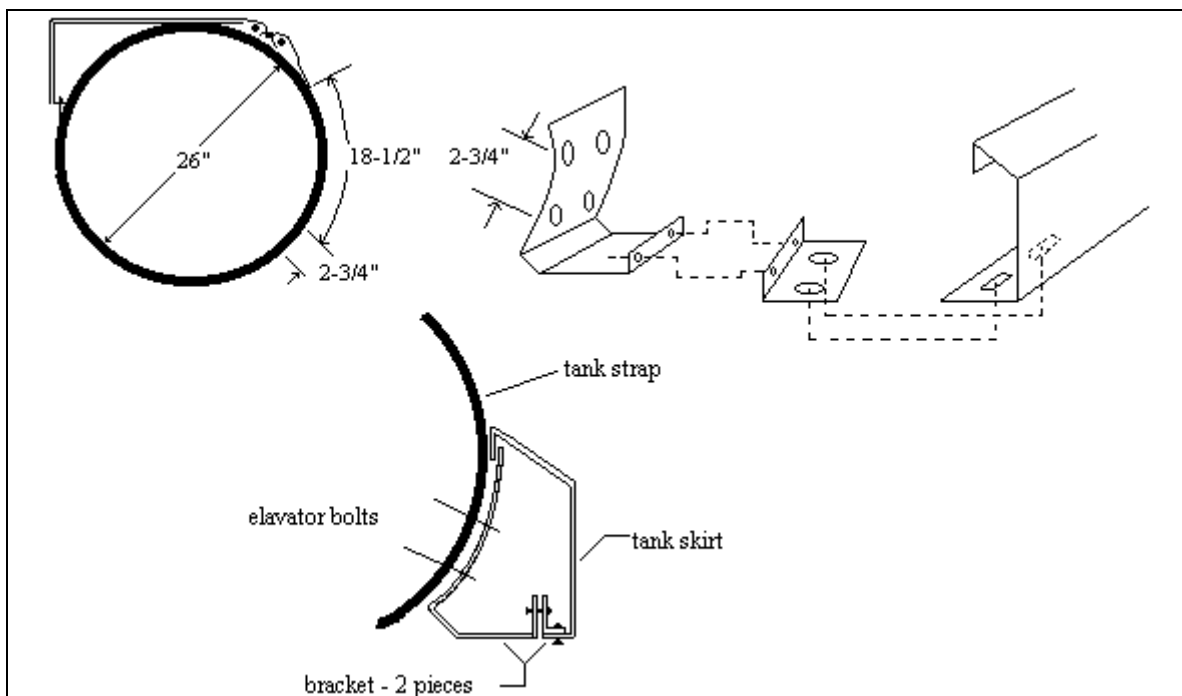

6. Insert elevator bolts through backside.
7. Install brackets to strap as per drawing and tighten until flush.
8. Re-tighten strap.
9. Do not tighten elevator bolts all the way loosen top bolts allowing skirt to be placed
10. Hook skirt at top of bracket as shown.
11. Making sure the tank skirt is level, drill 5/16" holes through bottom lip of tank skirt in bracket hole locations.
12. Bolt skirt at bottom to bracket.
13. Adjust skirt as necessary and complete tightening.
14. Remove protective plastic coating