


STAINLESS STEEL ACCESSORIES

GRILL FILLER STRIP

INSTALLATION INSTRUCTIONS

1. Remove Plastic coating Grill Filler.
2. Remove all bolts along bottom edge of grill.
3. The bolted flange on the Grill Filler Strip must be attached to rear of flat support bar behind grill. (See diagram below)

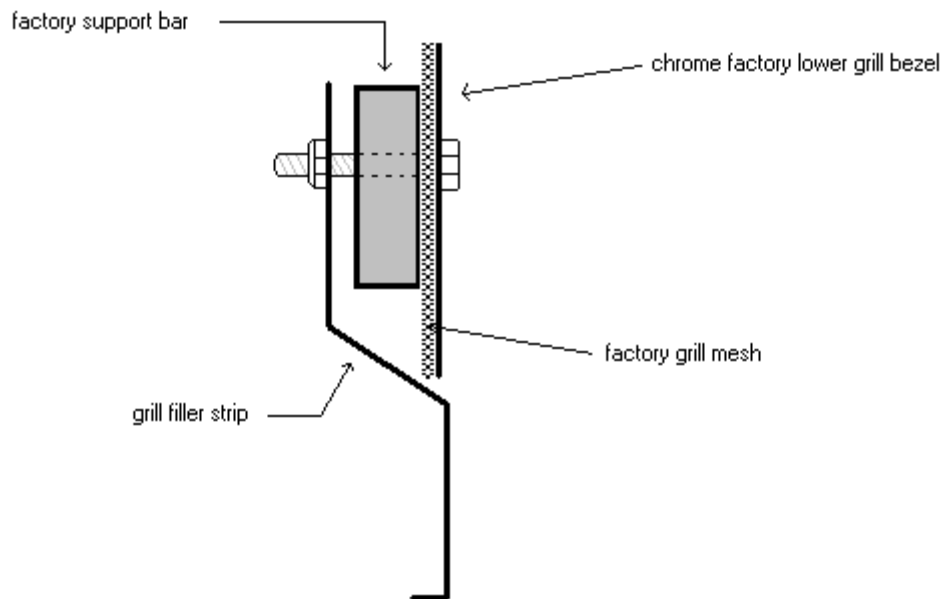

4. When Grill Filler Strip is in position behind the factory support bar, the bolt holes will line up with all factory holes.
5. Re-insert the bolts through the factory chrome grill bezel, the mesh, and the support.